


- ✚ Indoor application
- ✚ Low cost design
- ✚ Low insertion loss 0.5dB
- ✚ High reliability
- ✚ Compact volume
- ✚ Easy mounting
- ✚ ROHS compliant
- ✚ High rejection out of band

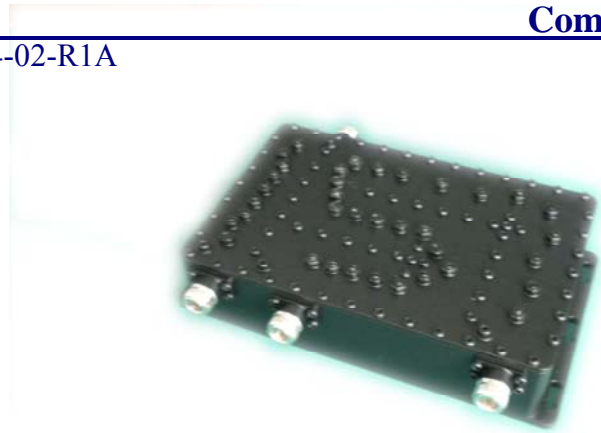

Technical Data:

Parameter	GSM900	GSM1800/3G	WLAN
Frequency Range (MHz)	800-960	1710-2170	2400-2500
Band-width (MHz)	160	460	100
Insertion Loss (dB)	≤0.5	≤0.5	≤0.5
Ripple in-band (dB)	≤0.4	≤0.4	≤0.4
Return Loss(dB)	≥18	≥18	≥18
Impedance(Ω)	50		
Power Rating(W)	50		
Stop-band Attenuation (dB)	≥80@1710-2500	≥80@800-960 ≥80@2400-2500	≥80@800-2170
Isolation(dB)	≥80@1710-2500	≥80@800-960 ≥80@2400-2500	≥80@800-2170
Connectors	N-F		
Temperature(°C)	-10~+70		
Size(mm)	217×164×54		
Weight(kg)	1.53		

Dimension:

