


- Indoor application
- Low cost design
- Low insertion loss 1.2dB
- High reliability
- Compact volume
- Easy mounting
- ROHS compliant
- High rejection out of band

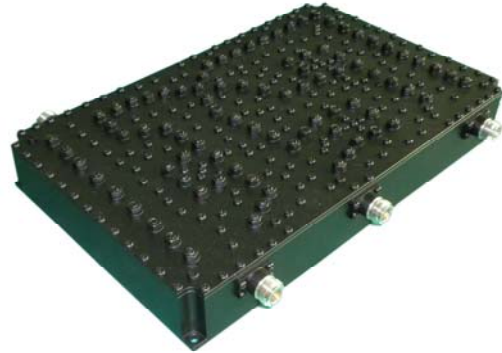

Technical Data:

Parameter	CH1	CH2	CH2
Frequency Range (MHz)	880-960&1710-1825	1880-2025&2300-2370	2400-2500
Band-width (MHz)	80/115	145/50	100
Insertion Loss (dB)	≤0.6	≤1.2	≤1.2
Ripple in-band (dB)	≤0.4	≤0.8	≤0.8
Return Loss(dB)	≥18	≥18	≥18
Impedance(Ω)	50		
Power Rating(W)	50		
Stop-band Attenuation (dB)	≥80 @1880-2500	≥80@880-1825 ≥80@2400-2500	≥80@880-2370
Isolation(dB)	≥80 @1880-2500	≥80@880-1825 ≥80@2400-2500	≥80@880-2370
Connectors	N-F		
Temperature(°C)	-10~+70		
Size(mm)	308×234×48		
Weight(kg)	3.8		

Dimension:

