


- ✚ High Q cavity structure
- ✚ Indoor application
- ✚ Compact volume
- ✚ Light weight
- ✚ Easy mounting
- ✚ ROHS compliant
- ✚ High reliability
- ✚ Custom design available

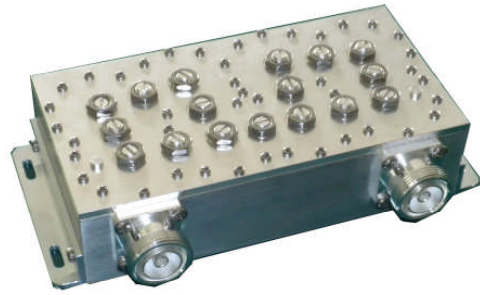

Technical Data:

Frequency Range (MHz)	825~880
Band-Width (MHz)	55
IL at BW (dB)	≤1.2
Return loss at BW (dB)	≥18
Stop-band Attenuation (dB)	≥50 @885~960
Impedance(Ω)	50
Connectors	DIN-F
Power Rating (W)	50
Temperature (°C)	-10~+70
Size (mm)	214×116.7×54
Weight(kg)	1.65

Dimension:

