


- High Q cavity structure
- ROHS compliant
- High reliability
- Easy mounting
- DC Stop
- High rejection out of band

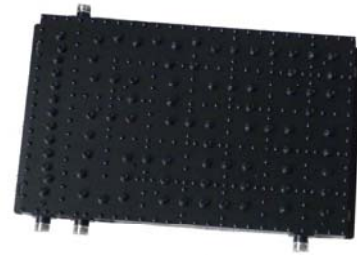

Technical Data:

Parameter	CH1	CH2	CH3
Frequency Range (MHz)	825-835&885-915	1755-1785&1920-1980	1880-1910&2010-2025
Band-width (MHz)	10/30	30/60	30/15
Insertion Loss (dB)	≤1.0	≤1.5	≤1.5
Ripple at BW (dB)	≤0.8	≤1.0	≤1.0
Stop-band Attenuation(dB)	≥80@1755~2025	≥80@825~915 ≥80@1880~1910 ≥80@2010~2025	≥80@825~1785 ≥80@1920~1980
Isolation(dB)	≥80@1755~2025	≥80@825~915 ≥80@1880~1910 ≥80@2010~2025	≥80@825~1785 ≥80@1920~1980
VSWR	≤1.3		
Impedance(Ω)	50		
Power Rating(W)	200		
Connectors	N-F		
Size(mm)	386×264×49		
Weight(kg)	4.50		

Dimension:

