


- ✚ Indoor application
- ✚ Compact volume
- ✚ Light weight
- ✚ Easy mounting
- ✚ ROHS compliant
- ✚ High Stability
- ✚ Low cost design

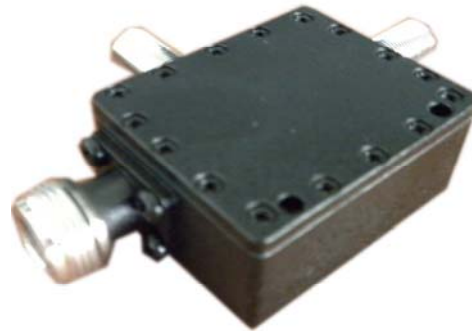

Technical Data:

Parameter	CATV	TD-SCDMA
Frequency Range (MHz)	50~750	1880~2400
Band-width (MHz)	700	520
Insertion Loss (dB)	≤3.0	≤3.0
VSWR	≤2	
Isolation(dB)	≥30	
Impedance (Ω)	CATV: 75; TD-SCDMA: 50; ANT: 75	
Connectors	CATV: F-F; TD-SCDMA: N-F; ANT: F-F	
Input Power (W)	1	
Temperature(°C)	-10~+40	
Size(mm)	90.6×62.1×20	
Weight(kg)	0.11	

Dimension:

