


- ✚ Indoor application
- ✚ Low cost design
- ✚ Low insertion loss 0.6dB
- ✚ High reliability
- ✚ Compact volume
- ✚ Easy mounting
- ✚ ROHS compliant
- ✚ High rejection out of band

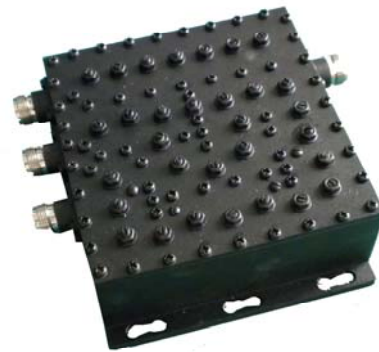

**Technical Data:**

Parameter	GSM900	TDA	TDB
Frequency Range (MHz)	885-954	1880-1920	2010-2025
Band-width (MHz)	69	40	15
Insertion Loss (dB)	≤0.6	≤0.6	≤0.6
Ripple in-band (dB)	≤0.4	≤0.4	≤0.4
Return Loss(dB)	≥18	≥18	≥18
Impedance(Ω)	50		
Power Rating(W)	50		
Stop-band Attenuation (dB)	≥80@1880-2025	≥80@885-954 ≥80@2010-2025	≥80@885-954 ≥80@1880-1920
Isolation(dB)	≥80@1880-2025	≥80@885-954 ≥80@2010-2025	≥80@885-954 ≥80@1880-1920
Connectors	N-F		
Temperature(°C)	-10~+70		
Size(mm)	163.7×151×53.9		
Weight(kg)	1.18		

**Dimension:**

