


- ✚ High Q cavity structure
- ✚ Low PIM power level-165dBc
- ✚ Good VSWR
- ✚ Indoor application
- ✚ Compact volume
- ✚ Light weight
- ✚ DC Stop
- ✚ High rejection out of band

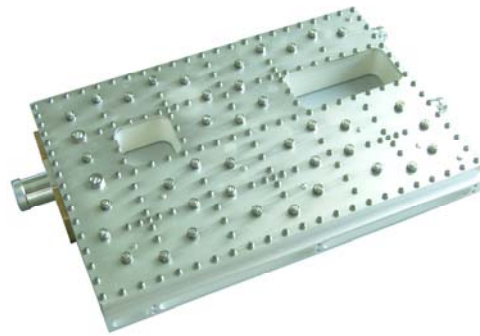

Technical Data:

Channels	Tx	Rx
Frequency Range(MHz)	1930~1990	1850~1910
Band Width(MHz)	60	60
Insertion Loss(dB)	≤1.0	≤2.0
Ripple in-band(dB)	≤0.6	≤0.6
Return Loss(dB)	≥22	≥22
Stop-band Attenuation(dB)	≥50@1850~1910MHz	≥120@1930~1990MHz
Isolation(dB)	≥50@1850~1910MHz	≥120@1930~1990MHz
Impedance (Ω)	50	
PIM(dBc)	≤-165@+43dBm × 2	
Connectors	DIN-KF/N-KF	
Power Rating(W)	100(Continuous)	
Temperature(°C)	-0~+50	
Size(mm)	392×243×44	
Weight(kg)	3.25	

Dimension:

