


- ✚ High-Q cavity structure
- ✚ Good VSWR
- ✚ Indoor application
- ✚ Compact volume
- ✚ Easy mounting
- ✚ Light weight
- ✚ ROHS compliant
- ✚ Custom design available

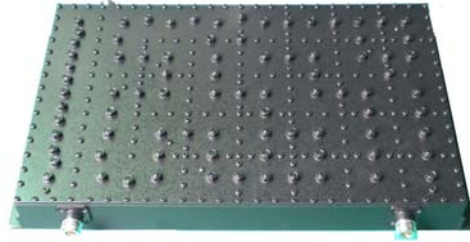

Technical Data:

Channels	CH1	CH2
Frequency Range(MHz)	825~915&1755~1785&1920~1980	1880~1910&2010~2025
Band Width(MHz)	90/30/60	30/15
Insertion Loss (dB)	≤1.5	≤1.5
Ripple in-band(dB)	≤1.0	≤1.0
Stop-band Attenuation (dB)	≥80@1880~1910 ≥80@2010~2025	≥80@825~1785 ≥80@1920~1980
Isolation(dB)	≥80@1880~1910 ≥80@2010~2025	≥80@825~1785 ≥80@1920~1980
Return Loss(dB)	≥18	
Impedance(Ω)	50	
Power Rating(W)	50(continue)	
Connectors	N-F	
Temperature(℃)	-10~+70	
Size(mm)	386×264×49	
Weight(kg)	4.50	

Dimension:

